




Tanım Automatic reclosing device
 Kod ReStart Rd PRO 4P
 uygun için IDP RCCBs - 2P/4P 100 A - 30 mA'ya kadar
 Nominal voltaj AC 230 V
 Nominal akım 25 - 40 - 63 - 80 - 100 A
 Modül sayısı 3
 Standart EN 50557
 Nominal frekans (Hz) 50Hz

Distribution system	TT - TN-S	Rated non-operating resistance between live parts and earth (Rdo)	8kΩ
Yalıtım voltajı	500 V	Rated operating resistance between live parts and earth (Rd)	16 kΩ
Voltaja dayanıklı nominal impuls	4 kV	Maximum operating frequency	30 oper./h
Aşırı voltaj kategorisi	III	Mekanik dayanıklılık	4000
Dielectric strength test voltage between pole and earth	2500 Vac for 1 minute	Type of residual current protection	AC - A - A[IR]
Nominal kaçak akım	30 mA	Çalıştırma sıcaklığı	-25 +60 °C
Depolama sıcaklığı	-40 +70 °C	Kontakt tipi	Photomos (potential free)
Voltage operating	5-230 V ac/dc	Current operating	0.6mA (min)-100mA cos=1 (max)
Operating frequency	50 Hz	Kullanım kategorisi	AC12
Operating modes	NO/NC/NO with handle position signalling function	Nominal sıkıştırma torku	0,4 Nm
Terminal section	≤ 2,5 mm ²	Automatic reclosure for untimely tripping	Evet
Earth failure test	Evet	Continuous system monitoring	Evet
Komple kontrollü	One device among: GW90945 Wi-Fi Module - GWD0951 Auxiliary contact - GW90992 RS485 BUS Module	Elektrokod	1414

DIMENSIONAL

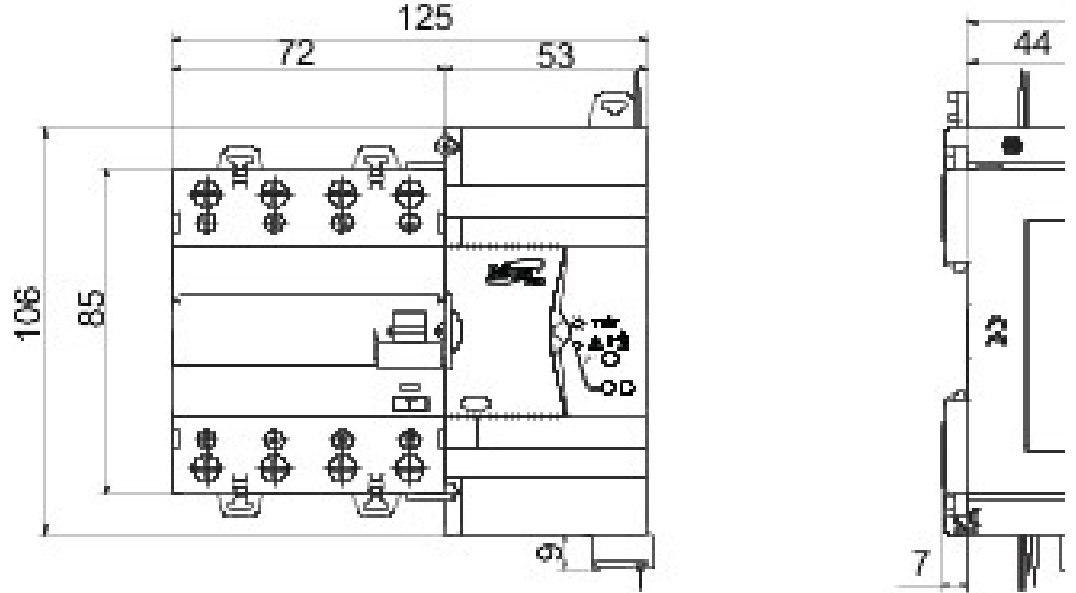

STANDARDS/APPROVALS

